




12A6

12A6

BEAM POWER AMPLIFIER

Heater#	Coated Unipotential Cathode	
Voltage	12.6	a-c or d-c volts
Current	0.15	amp.
Direct Interelectrode Capacitances (Approx.): ^o		
Grid to Plate	0.3	μ f
Input	9.0	μ f
Output	9.0	μ f
Maximum Overall Length		3-1/4"
Maximum Seated Height		2-11/16"
Maximum Diameter		1-5/16"
Bulb		Metal Shell, MT-8
Base		Small Wafer Octal 7-Pin
Pin 1 - Shell		Pin 5 - Grid
Pin 2 - Heater		Pin 7 - Heater
Pin 3 - Plate		Pin 8 - Cathode
Pin 4 - Screen		
Mounting Position		Any



BOTTOM VIEW (7AC)


*Maximum Ratings Are Design-Center Values*AMPLIFIER

Plate Voltage	250 max.	volts
Screen Voltage	250 max.	volts
Plate Dissipation	7.5 max.	watts
Screen Dissipation	1.5 max.	watts
<i>Operating Conditions and Characteristics—Class A₁ Amplifier:</i>		
Plate	250	volts
Screen	250	volts
Grid*	-12.5	volts
Peak A-F Grid Voltage	12.5	volts
Zero-Signal Plate Current	30	ma.
Max.-Signal Plate Current	32	ma.
Zero-Signal Screen Current	3.5 approx.	ma.
Max.-Signal Screen Current	5.5 approx.	ma.
Plate Resistance	70000 approx.	ohms
Transconductance	3000	μ mhos
Load Resistance	7500	ohms
Total Harmonic Distortion	7	%
Max.-Signal Power Output	3.4	watts

In circuits where the cathode is not directly connected to the heater, the potential difference between heater and cathode should be kept as low as possible.

* The d-c resistance in the grid circuit should not exceed 0.1 megohm when fixed bias is used, or 0.5 megohm when cathode bias is used.

^o With shell connected to cathode.



← Indicates a change.

May 1, 1942

RCA RADOTRON DIVISION
RCA MANUFACTURING COMPANY, INC


TENTATIVE DATA

12A6



12A6

AVERAGE PLATE CHARACTERISTICS PENTODE CONNECTION

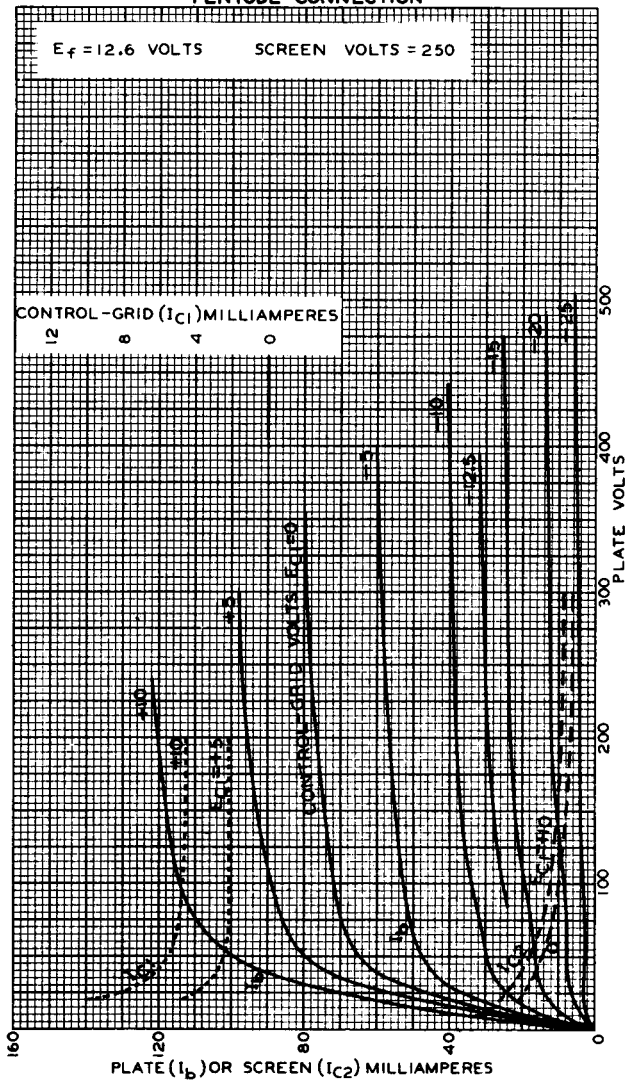

OCT. 14, 1941

RCA RADOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.


92C-6329



12A6

AVERAGE PLATE CHARACTERISTICS TRIODE CONNECTION

12A6

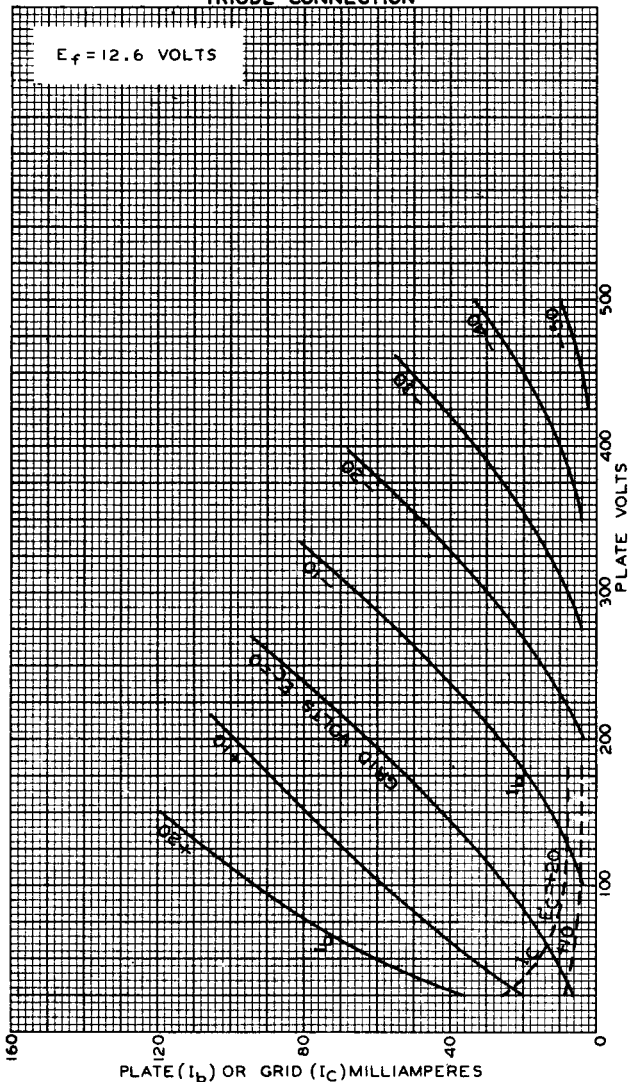

OCT. 13, 1941

RCA RADIONRON DIVISION
RCA MANUFACTURING COMPANY, INC.

92C-6327


12A6



12A6

OPERATION CHARACTERISTICS

$E_f = 12.6$ VOLTS PLATE VOLTS = 250 SCREEN VOLTS = 250
 CONTROL-GRID VOLTS = -12.5 SIGNAL VOLTS (RMS) = 8.8

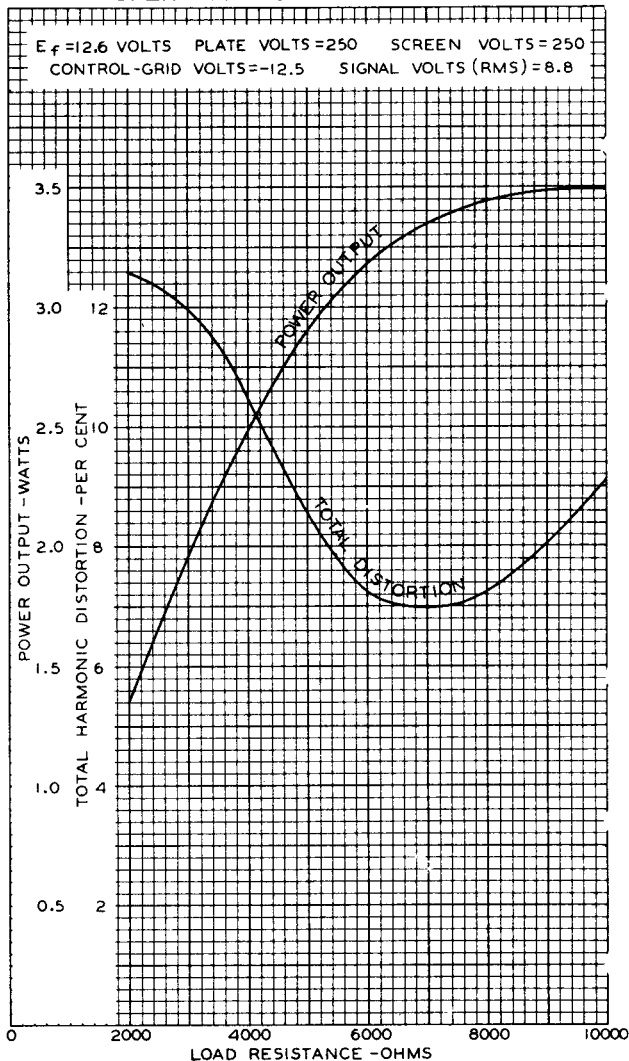

JAN. 10, 1942

RCA RADIODIVISION
RCA MANUFACTURING COMPANY, INC.

92C-6354