

# Central ELECTRONIC

## MANUFACTURERS

DENVILLE, NEW JERSEY

GAS NOISE TUBE	S
CNT-S18D-1	18 Db

References and notations contained herein are taken from Military Specifications for Electron tubes MIL-E-1D 31 March '58.

Description: Gaseous Discharge Diode, S Band (Note 11)

Ratings:

	If	Ib	TA	T Bulb
	mA	mAdc	°C	°C
Absolute Maximum:	..	..	+85	+125
Minimum:	..	..	-55	..
Test Conditions:	0	250	..	..

Cathode: Filamentary Type.

Dimensions: Per Outline Drawing (Fig. 1)

Base: Per Outline Drawing (Fig. 1)

Mounting Position: Any

Ref. Para.	Test	Conditions	Min.	Max.
...	Qualification:	Required.		
4.5	Holding Period:	168 hours		
4.9.18.1.10	Carton Drop:	...		
4.9.20.3	*Vibration:	No Voltages, Note 9.		
4.10.5.1	Filament Voltage:	$I_f = 300 \text{ mAdc}$	$E_f \dots$	10Vdc
4.13.2	Tube Voltage Drop:	Note 1,2	$E_{td} 160$	170Vdc
...	Excess Noise Ratio:	$F = 3300 \text{ Mc.}$ Notes 3,4,5,10.	$N_r - 1$ 17.5	18.5Db
...	Match (1):	$F = 3270 \text{ Mc.}$ Notes 4,6. $I_b = 250 \text{ mAdc}$	VSWR	1.15:1
...	*Match (2):	$F = 3270 \text{ Mc.}$ $I_b = 0 \text{ mAdc}$ Notes 4,6.	VSWR	1.15:1
...	Intermittent Life Test	Notes 1,3,8,9. (One min. on, two min. off) Preheat time = 2 to 3 sec.	2500	Cycles
4.11.4	Intermittent Life Test End Points Excess Noise Ratio: Note 11.		$N_r - 1$ 17.5	18.5Db

- Note 1. The tube shall be tested in the circuit of Fig. 3.
- Note 2. In the test circuit of Fig. 3, with a filament current of 300 mAdc, the tube shall operate within three tries.
- Note 3. The tube shall be tested in total darkness.
- Note 4. The tube shall be tested in a tube mount as specified in Figure 2, or equivalent, terminated by a matched RG-48/U termination having a VSWR no greater than 1.01:1 Excessive Noise Ratio Measurement tests shall be made using the circuit of block diagram Fig. 4, or equivalent.
- Note 5. The frequency specified is that of the Local Oscillator.

- Note 6. The frequency specified is that of the Signal Generator.
- Note 7. Excess noise ratio should be measured by comparison with an approved standard.
- Note 8. The tube shall be tested at an ambient temperature of +85°C.
- Note 9. Intermittent Life Test end points shall apply.
- Note 10. The Excess Noise Ratio ( $N_r - 1$ ) is defined in Db as  $N_r - 1 = 10 \log \left( \frac{T_e}{290} - 1 \right)$  where  $T_e$  is the effective electron temperature.
- Note 11. The noise frequencies generated by this tube cover a broad band of frequencies. This bandwidth is limited only by the type of mount used. This tube is normally used with a mount in RG-48/U wave guide, at a 10 degree angle in the E plane. Other wave guide sizes may be used with properly adapted mounts.

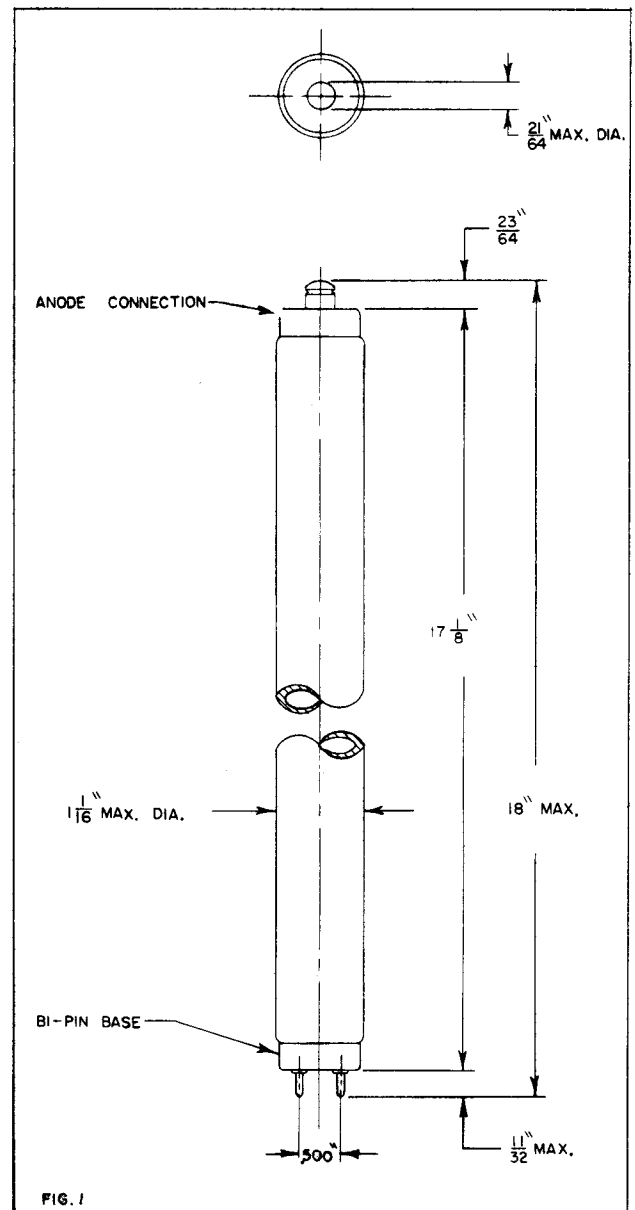


FIG. 1



# Central ELECTRONIC

## MANUFACTURERS

DENVILLE, NEW JERSEY



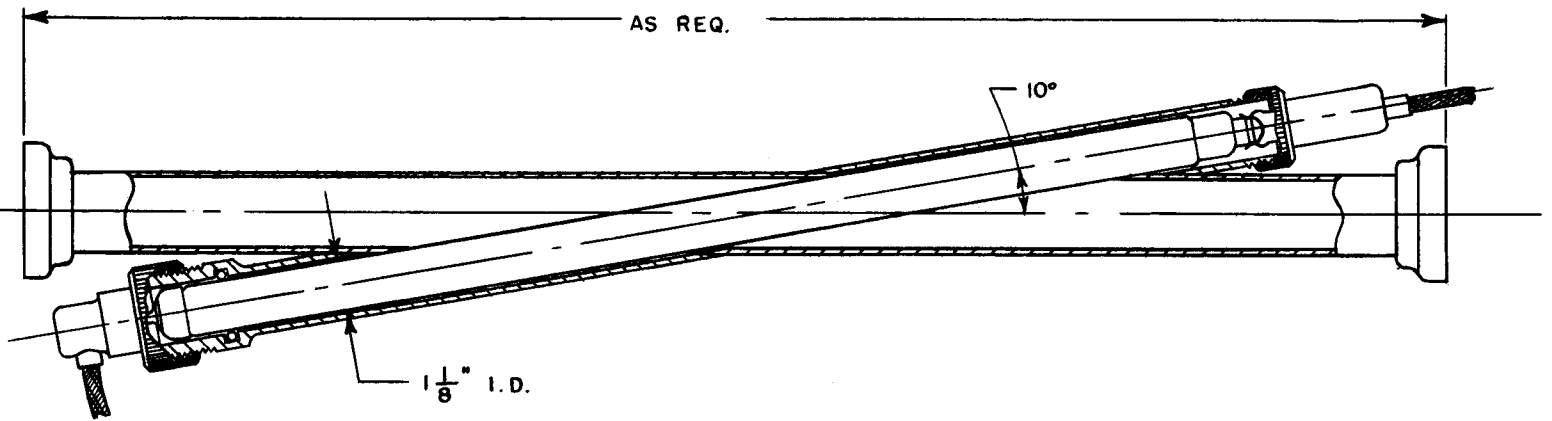


FIG. 2

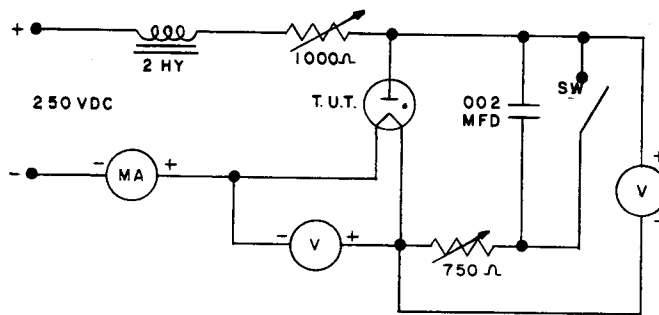

D.C. TEST CIRCUIT

FIG. 3

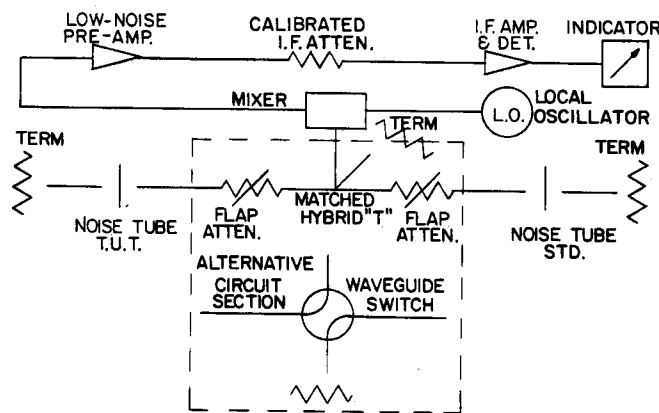

TEST CIRCUIT FOR EXCESS NOISE MEASUREMENTS  
FIG. 4

