

# HALF WAVE RECTIFIER

# PY31

Indirectly heated half wave rectifier with  
300mA heater for DC/AC operation.

## HEATER

$I_h$	0.3	A
$V_h$	17	V

## MOUNTING POSITION

Any

## OPERATING CONDITIONS

$V_a$ (r.m.s.) (V)	C max. ( $\mu$ F)	$R_{llm}$ min. ( $\Omega$ )
250	60	175
250	32	125
250	16	75
250	8.0	0
170	60	100
170	32	75
170	16	30
127	60	0



## LIMITING VALUES

P.I.V. max.	1.0	kV
$V_a$ (r.m.s.) max.	250	V
$I_a$ max.	125	mA
$V_{h-k(pk)}$ max.	300	V
C max.	60	$\mu$ F

# PY31

## HALF WAVE RECTIFIER

*Indirectly heated half wave rectifier with  
300mA heater for DC/AC operation.*

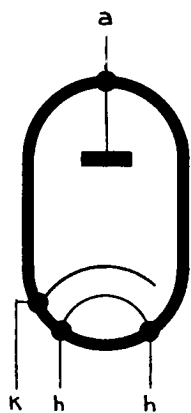

OCTAL BASE

